

EL 250 E2 01


112382

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust single phase AC motor
- Conveyed medium temperature up to 55 °C in continuous operation
- Housing made of galvanized steel sheet



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

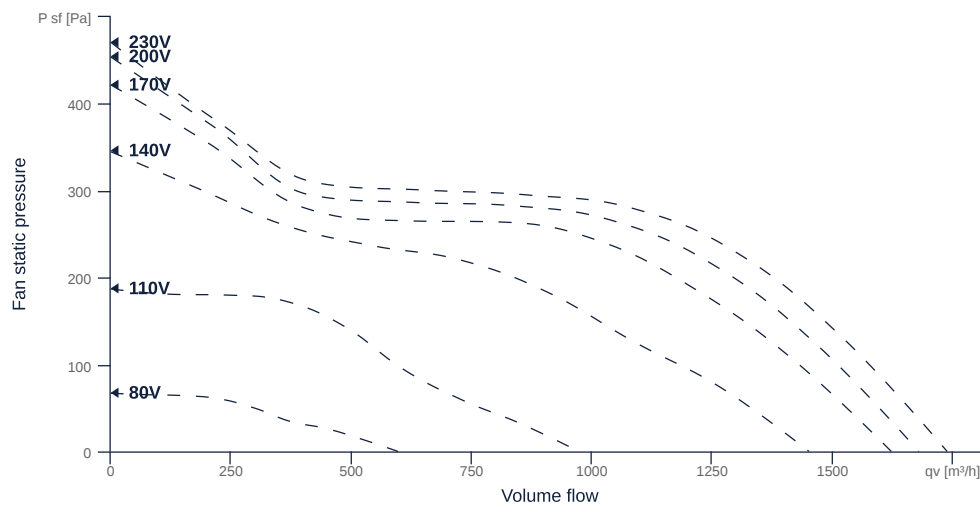

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	6.41	kg	m
Fan type	Diagonal		Fa _{ntype}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	180	W	P _{ed, max}
Max. operating current (device)	1	A	I _{ed, max}
Max. speed	2890	1/min	n _{max}
Max. stat. efficiency	44.8	%	η _{es}
Max. fan efficiency	49.2	%	η _e
Max. flowrate	1740	m ³ /h	Q _{v, max}
Max. stat pressure	470	Pa	p _{sf, max}
Max. medium temperature	55	°C	T _{m, max}
Max. environment temperature	55	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	V	U _{min}
Stall current	2.59	A	I _{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TMI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		6	μF	Ccond
Voltage capacitor		400	V	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Rated current	0.9		A	Irated, f1
Speed	2750		1/min	n _{r1}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2824	1/min	n _{opt}
Efficiency level	44.9	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.17	kW	P _{e, opt}
Overall efficiency	63.4	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	274	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1119	m ³ /h	Q _{v, opt}



to the product detail page