

ISOR 200 E2 K 01


167422

- Soundproof centrifugal fan with backward curved impeller
- Galvanized sheet steel housing
- Connection spigots with double lip seal
- Swing-out fan unit
- Robust single-phase AC motor, voltage controllable
- Integrated thermal switch
- Suitable for outdoor installation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

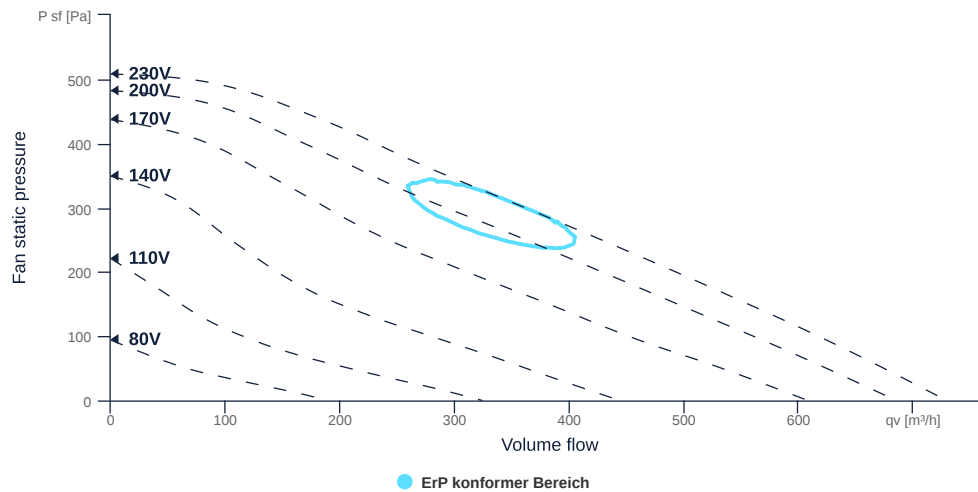

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN200		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IP54		IP _{compl}
IP-Protection class (terminal box)	IP66		IP _{ebox}
Weight	17.55	kg	m
Nominal air flow rate, nominal point m ³ /h	374.4	m ³ /h	q _{v,nom}
Nominal external pressure, static	292.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.1	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.1	kW	P _{e,nom}
Face velocity, nominal point	3.3	m/s	v _{nom}
Nominal external pressure, static	292.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	28.5	%	η _{es,SUP}
Highest external air leakage rate	2.07	%	
Enclosure sound level, nominal point	59	dba	LWA2
Rating	Product is compliant 2018		



to the product detail page

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	100	130	W	P _{ed, max}
Max. operating current (device)	0.46	0.6	A	I _{ed, max}
Max. speed	2680	3020	1/min	n _{max}
Max. stat. efficiency	28.4	24.6	%	η _{es}
Max. fan efficiency	29.1	25.1	%	η _e
Max. flowrate	730	760	m³/h	q _{v, max}
Max. stat pressure	510	640	Pa	p _{sf, max}
Max. medium temperature	80	80	°C	T _{m, max}
Max. environment temperature	80	80	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrSup _{motor}
Capacity capacitor		2.5	μF	C _{cond}
Voltage capacitor		450	V	V _{Ucond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.43		A	I _{rated, f1}
Speed	2390		1/min	n _{f1}
Efficiency	47.3		%	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.980000	0.000000		cos φ
UL-Certification motor		None		ULcert



to the product detail page