

# ISOR 315 EC K 01


167346

- Soundproof centrifugal fan with backward curved impeller
- Galvanized sheet steel housing
- Connection spigots with double lip seal
- Swing-out fan unit
- EC motor, external rotor, steplessly controllable
- Internal electronic temperature monitoring
- Suitable for outdoor installation



## FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

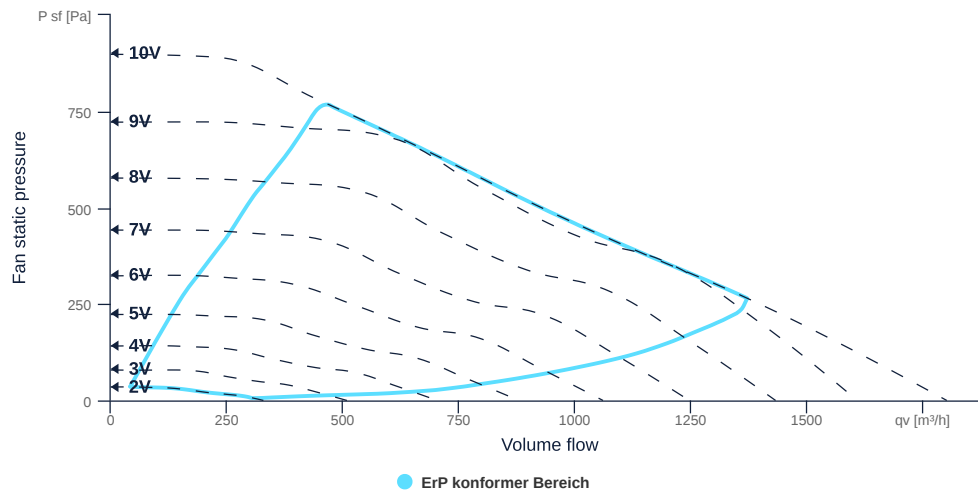

to the product detail page

## GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	230	V	U <sub>rated</sub>
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Galvanized steel		matimpeller
IP-protection class (entire device)	IP54		IP <sub>compl</sub>
IP-Protection class (terminal box)	IP66		IP <sub>ebox</sub>
Weight	25	kg	m
Nominal air flow rate, nominal point m <sup>3</sup> /h	1371.6	m <sup>3</sup> /h	q <sub>v,nom</sub>
Nominal external pressure, static	265	Pa	p <sub>s,nom</sub>
Fan type	Radial		Fan <sub>type</sub>
Category / Installation situation	A		cat

## ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m <sup>3</sup> /s	0.38	m <sup>3</sup> /s	q <sub>v,nom</sub>
Actual electrical input power, nominal point	0.29	kW	P <sub>e,nom</sub>
Face velocity, nominal point	4.89	m/s	v <sub>nom</sub>
Nominal external pressure, static	265	Pa	p <sub>s,nom</sub>
static efficiency of the extract fan, nominal point	34.46	%	η <sub>es,EHA</sub>
Enclosure sound level, nominal point	66.88	dba	LWA2
Rating	Product is compliant 2018		



to the product detail page

## MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	274	274	W	$P_{ed, max}$
Max. operating current (device)	1.91	1.91	A	$I_{ed, max}$
Max. speed	2890	2890	1/min	$n_{max}$
Max. stat. efficiency	44.4	44.4	%	$\eta_{es}$
Max. fan efficiency	44.8	44.8	%	$\eta_e$
Max. flowrate	1800	1800	m <sup>3</sup> /h	$q_{v, max}$
Max. stat pressure	900	900	Pa	$p_{sf, max}$
Max. medium temperature	55	55	°C	$T_{m, max}$
Max. environment temperature	55	55	°C	$T_{amb, max}$
Min. environment temperature	-30	-30	°C	$T_{amb, min}$

## MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP30		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	V	$U_{rated, f1}$
Rated current	1.74	1.74	A	$I_{rated, f1}$
Shaft power	272	272	W	$P_{out, f1}$
Speed	2547	2547	1/min	$n_{f1}$
Efficiency	52		%	$\eta_{m, f1}$
Min. temperature		-30	°C	$T_{motor, min}$
Cos Phi	0.000000	0.680000		$\cos \varphi$
UL-Certification motor		None		ULcert



to the product detail page