

KVR 6035 EC 30


131357

- Backward curved centrifugal impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

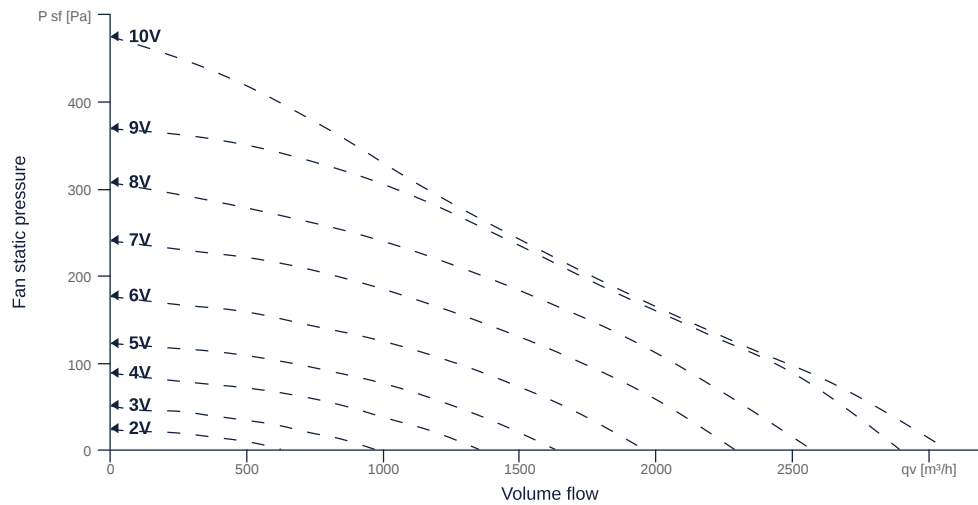

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	600x350		WxHduct
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	22.7	kg	m
Nominal air flow rate, nominal point m ³ /h	1350	m ³ /h	q _{Vnom}
Nominal external pressure, static	200	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.38	m ³ /s	q _{V,nom}
Actual electrical input power, nominal point	0.12	kW	P _{e,nom}
Face velocity, nominal point	1.8	m/s	V _{nom}
Nominal external pressure, static	200	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	63.4	%	η _{es,SUP}
Highest external air leakage rate	0.51	%	
Enclosure sound level, nominal point	67	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

KVR 6035 EC 30

131357

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	165	165	W	$P_{ed, max}$
Max. operating current (device)	1.38	1.38	A	$I_{ed, max}$
Max. speed	1560	1560	1/min	n_{max}
Max. stat. efficiency	57.3	57.3	%	η_{es}
Max. fan efficiency	57.8	57.8	%	η_e
Max. flowrate	3065	3065	m ³ /h	$q_{v, max}$
Max. stat pressure	475	475	Pa	$p_{sf, max}$
Max. medium temperature	60	60	°C	$T_{m, max}$
Max. environment temperature	60	60	°C	$T_{amb, max}$
Min. environment temperature	-25	-25	°C	$T_{amb, min}$

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO B		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwsupmotor
Rated voltage	230		V	$U_{rated, f1}$
Rated current	1.4		A	$I_{rated, f1}$
Shaft power	168		W	$P_{out, f1}$
Speed	1250		1/min	n_{f1}
Efficiency	65.5		%	$\eta_m, f1$
Min. temperature	-25		°C	$T_{motor, min}$
UL-Certification motor		UL recognized		ULcert



to the product detail page