

KVR 7040 EC 30


131365

- Backward curved centrifugal impeller
- Removable fan unit
- Housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 50 °C in continuous operation



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

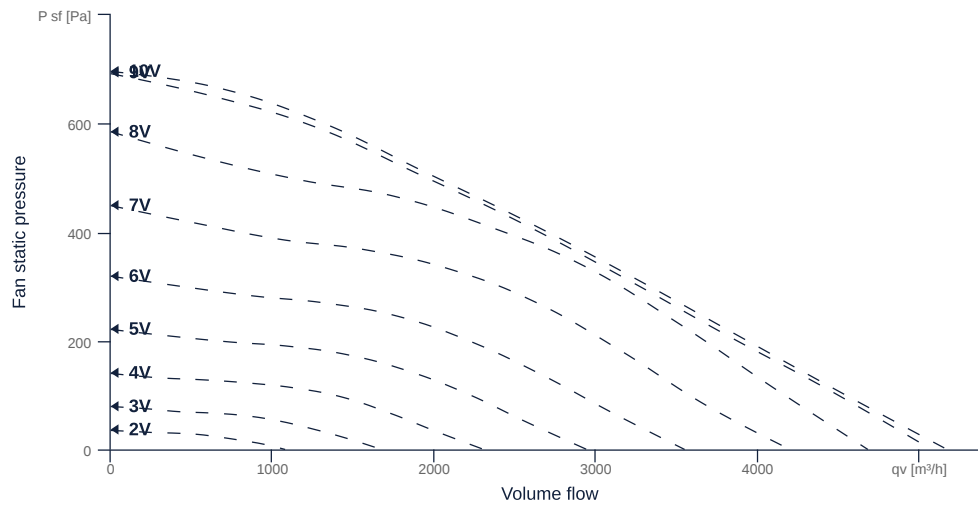

to the product detail page

KVR 7040 EC 30

131365

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	700x400		WxHduct
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	33	kg	m
Nominal air flow rate, nominal point m ³ /h	2628	m ³ /h	q _{Vnom}
Nominal external pressure, static	411.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.73	m ³ /s	q _{V,nom}
Actual electrical input power, nominal point	0.51	kW	P _{e,nom}
Face velocity, nominal point	2.6	m/s	V _{nom}
Nominal external pressure, static	411.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	64.2	%	η _{es,SUP}
Enclosure sound level, nominal point	73	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

KVR 7040 EC 30

131365

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	510	510	W	P _{ed, max}
Max. operating current (device)	2.35	2.35	A	I _{ed, max}
Max. speed	1510	1510	1/min	n _{max}
Max. stat. efficiency	55.7	55.7	%	η _{es}
Max. fan efficiency	56.3	56.3	%	η _e
Max. flowrate	5170	5170	m ³ /h	q _{v, max}
Max. stat pressure	690	690	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	230	230	V	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISO _{class}
Motor-protection		TEC		protect _{motor}
Protection class		IP55		IP _{motor}
Is pole-changeable		No		pole _{exch}
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230		V	U _{rated, f1}
Rated current	2.2		A	I _{rated, f1}
Shaft power	500		W	P _{out, f1}
Speed	1260		1/min	n _{f1}
Efficiency	61		%	η _{m, f1}
Min. temperature	-25		°C	T _{motor, min}
UL-Certification motor		UL recognized		UL _{cert}



to the product detail page