

MPC 250 EC 40


157954

- Centrifugal fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Highly efficient EC motor, steplessly controllable
- Internal electronic temperature monitoring
- With bottom tray



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

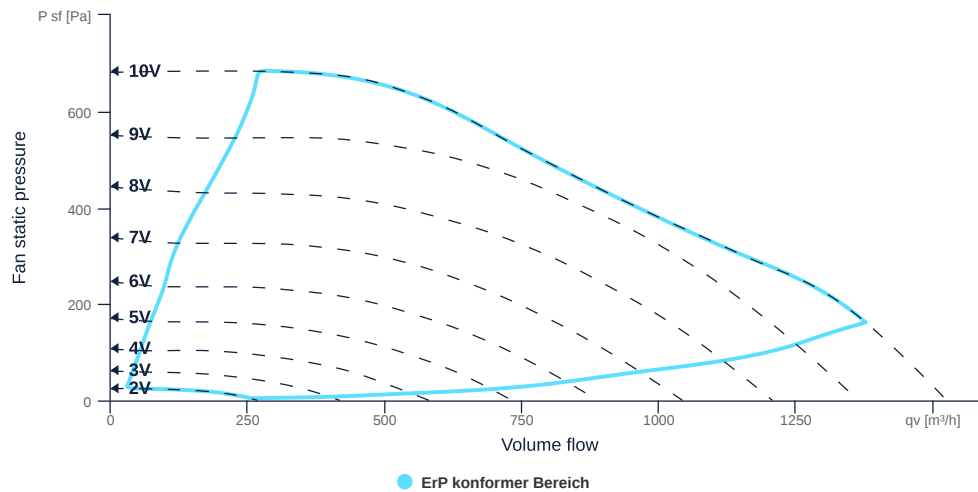

to the product detail page

MPC 250 EC 40

157954

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP44		IPebox
Weight	28.9	kg	m
Nominal air flow rate, nominal point m ³ /h	1378.8	m ³ /h	q _{v,nom}
Nominal external pressure, static	162	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.38	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.19	kW	P _{e,nom}
Face velocity, nominal point	2.83	m/s	V _{nom}
Nominal external pressure, static	162	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	31.9	%	η _{es,EHA}
Highest external air leakage rate	0.2	%	
Enclosure sound level, nominal point	59.99	dB(A)	LWA2
Rating	Product is compliant 2018		



to the product detail page

MPC 250 EC 40

157954

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	207	207	W	$P_{ed, max}$
Max. operating current (device)	1.76	1.76	A	$I_{ed, max}$
Max. speed	2995	2995	1/min	n_{max}
Max. stat. efficiency	50.4	50.4	%	η_{es}
Max. fan efficiency	50.7	50.7	%	η_e
Max. flowrate	1520	1520	m ³ /h	q_v, max
Max. stat pressure	680	680	Pa	$p_{sf, max}$
Max. medium temperature	70	70	°C	T_m, max
Max. environment temperature	70	70	°C	$T_{amb, max}$
Min. environment temperature	-30	-30	°C	$T_{amb, min}$

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230		V	$U_{rated, f1}$
Rated current	1.2		A	$I_{rated, f1}$
Shaft power	165		W	$P_{out, f1}$
Speed	2600		1/min	n_{f1}
Efficiency	46.9		%	$\eta_m, f1$
Min. temperature	-30		°C	$T_{motor, min}$
Cos Phi	0.600000	0.000000		$\cos \varphi$
UL-Certification motor		None		ULcert



to the product detail page