


MPC 315 D4 40


157193

- Centrifugal fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Efficient IE3 motor, frequency controllable
- Motor protection via frequency converter or motor protection switch
- With bottom tray

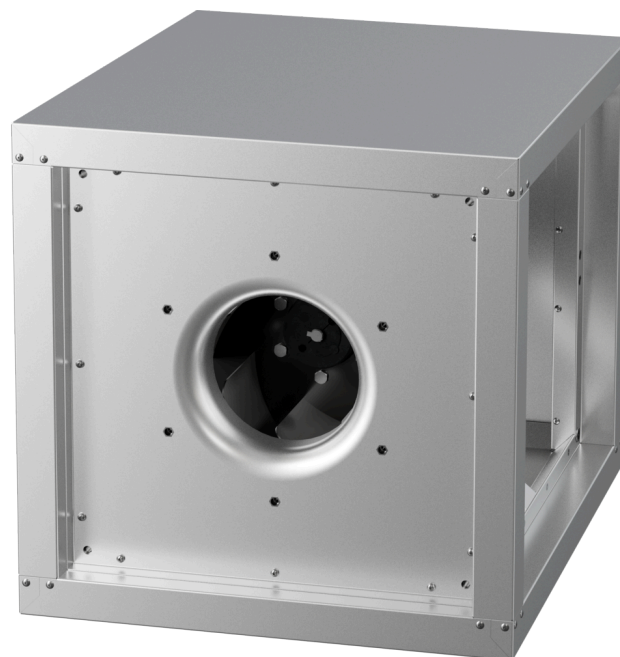

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

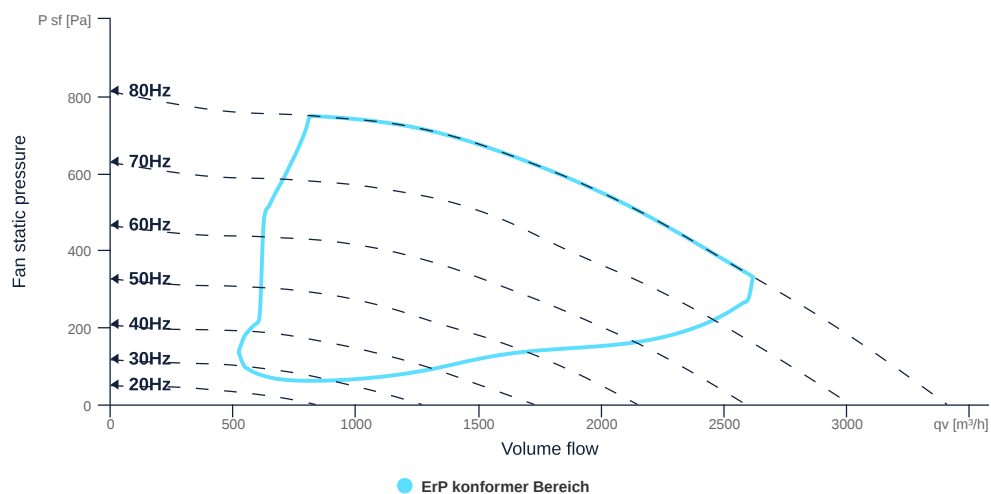

to the product detail page

MPC 315 D4 40

157193

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	400	V	Urated
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Coated steel		matimpeller
Weight	39	kg	m
Nominal air flow rate, nominal point m ³ /h	2617.2	m ³ /h	qVnom
Nominal external pressure, static	331	Pa	ps, nom
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.73	m ³ /s	qV, nom
Actual electrical input power, nominal point	0.6	kW	Pe, nom
Face velocity, nominal point	5.38	m/s	Vnom
Nominal external pressure, static	331	Pa	ps, nom
static efficiency of the extract fan, nominal point	40.22	%	η _{es, EHA}
Highest external air leakage rate	0.1	%	
Enclosure sound level, nominal point	59.46	dba	LWA2
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	617	W	P _{ed, max}
Max. operating current (device)	1.1	A	I _{ed, max}
Max. speed	2360	1/min	n _{max}
Max. stat. efficiency	46.3	%	η _{es}
Max. fan efficiency	46.9	%	η _e
Max. flowrate	3410	m ³ /h	q _{w, max}
Max. stat pressure	810	Pa	p _{sf, max}
Max. medium temperature	60	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPC 315 D4 40

157193

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ	Δ		wiringw1
Connection (wiring 2)	Y	Y		wiringw2
Rated voltage	230	265	V	U _{rated, f1}
Rated voltage (wiring 2)	400	460	V	U _{rated, f2}
Rated current	2.37	2.07	A	I _{rated, f1}
Rated current (wiring 2)	1.37	1.2	A	I _{rated, f2}
Shaft power	550	550	W	P _{out, f1}
Shaft power (wiring 2)	550	550	W	P _{out, f2}
Speed	1455	1762	1/min	n _{f1}
Speed (wiring 2)	1455	1762	1/min	n _{f2}
Efficiency	80.8	81.1	%	$\eta_m, f1$
Efficiency (wiring 2)	80.8	81.1	%	$\eta_m, f2$
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
UL-Certification motor		None		ULcert



to the product detail page