

MPC 450 EC 40


157960

- Centrifugal fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Highly efficient EC motor, steplessly controllable
- Internal electronic temperature monitoring
- With bottom tray



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

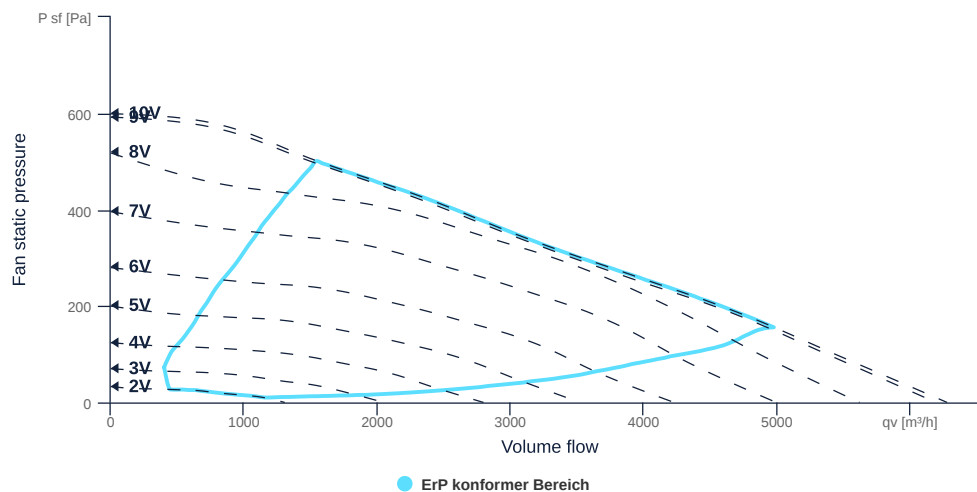

to the product detail page

MPC 450 EC 40

157960

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN500		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	50	kg	m
Nominal air flow rate, nominal point m ³ /h	3168	m ³ /h	q _{v,nom}
Nominal external pressure, static	337.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.88	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.53	kW	P _{e,nom}
Face velocity, nominal point	2.7	m/s	v _{nom}
Nominal external pressure, static	337.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	62.5	%	η _{es,SUP}
Highest external air leakage rate	0.17	%	
Enclosure sound level, nominal point	62	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

MPC 450 EC 40

157960

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	527	527	W	$P_{ed, max}$
Max. operating current (device)	2.43	2.43	A	$I_{ed, max}$
Max. speed	1510	1510	1/min	n_{max}
Max. stat. efficiency	53.6	53.6	%	η_{es}
Max. fan efficiency	54.5	54.5	%	η_e
Max. flowrate	6270	6270	m ³ /h	$q_{v, max}$
Max. stat pressure	600	600	Pa	$p_{sf, max}$
Max. medium temperature	50	50	°C	$T_{m, max}$
Max. environment temperature	50	50	°C	$T_{amb, max}$
Min. environment temperature	-25	-25	°C	$T_{amb, min}$

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230		V	$U_{rated, f1}$
Rated current	2.2		A	$I_{rated, f1}$
Shaft power	500		W	$P_{out, f1}$
Speed	1260		1/min	n_{f1}
Efficiency	61		%	$\eta_m, f1$
Min. temperature	-25		°C	$T_{motor, min}$
UL-Certification motor		UL recognized		ULcert



to the product detail page