

MPS 400 EC 30


149318

- Backward curved centrifugal impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- High efficiency EC motor outside the air flow
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

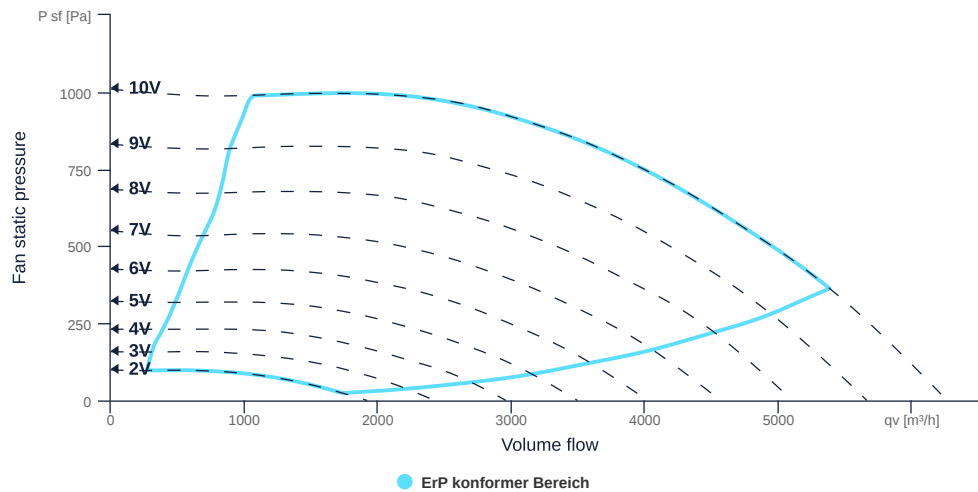

to the product detail page

MPS 400 EC 30

149318

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	10 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Coated steel		mat _{impeller}
Weight	48.4	kg	m
Nominal air flow rate, nominal point m ³ /h	3276	m ³ /h	q _{v,nom}
Nominal external pressure, static	857.1	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.91	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	1.19	kW	P _{e,nom}
Face velocity, nominal point	9.2	m/s	v _{nom}
Nominal external pressure, static	857.1	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	68.3	%	η _{es,SUP}
Highest external air leakage rate	0.27	%	
Enclosure sound level, nominal point	75	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

MPS 400 EC 30

149318

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1333	1333	W	$P_{ed, max}$
Max. operating current (device)	9.7	9.7	A	$I_{ed, max}$
Max. speed	2000	2000	1/min	n_{max}
Max. stat. efficiency	61	61	%	η_{es}
Max. fan efficiency	65.3	65.3	%	η_e
Max. flowrate	6262	6262	m ³ /h	Q_v, max
Max. stat pressure	1010	1010	Pa	$p_{sf, max}$
Max. medium temperature	120	120	°C	T_m, max
Max. environment temperature	50	50	°C	$T_{amb, max}$
Min. environment temperature	-20	-20	°C	$T_{amb, min}$

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} motor
Rated voltage	230		V	$U_{rated, f1}$
Rated current	8		A	$I_{rated, f1}$
Shaft power	1100		W	$P_{out, f1}$
Speed	2100		1/min	n_{f1}
UL-Certification motor		None		ULcert



to the product detail page