

RS 160 10


134986

- Compact centrifugal fan
- Backward curved impeller
- Sheet steel housing, RAL 7035, powder coated
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 70 °C in continuous operation
- Integrated thermal switch



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

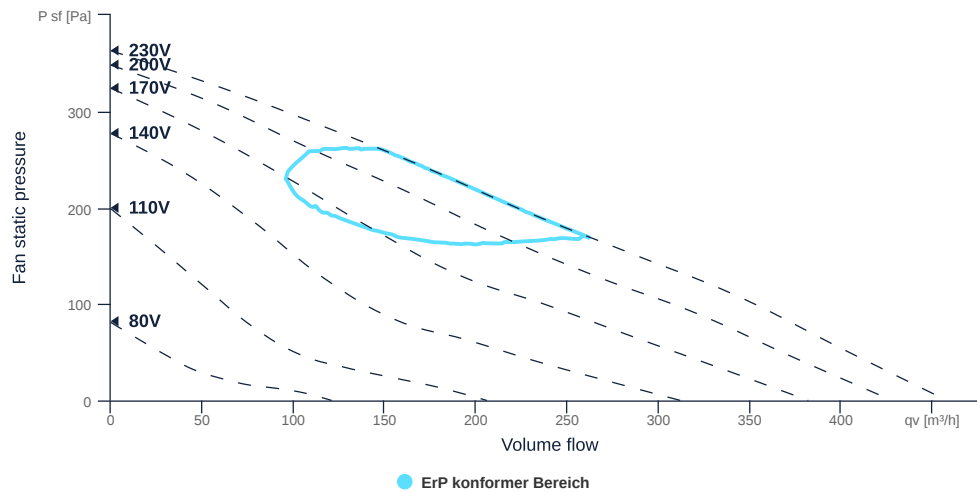

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN160		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		matcasing
Impeller material	Plastic		matimpeller
IP-protection class (casing)	IPX4		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	2.98	kg	m
Nominal air flow rate, nominal point m ³ /h	262.8	m ³ /h	q _{v,nom}
Nominal external pressure, static	169	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m ³ /s	0.07	m ³ /s	q _{v,nom}
Actual electrical input power, nominal point	0.05	kW	P _{e,nom}
Face velocity, nominal point	3.62	m/s	v _{nom}
Nominal external pressure, static	169	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	23.7	%	η _{es,EHA}
Enclosure sound level, nominal point	47.64	dba	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	49	63	W	P _{ed, max}
Max. operating current (device)	0.31	0.36	A	I _{ed, max}
Max. speed	2750	3180	1/min	n _{max}
Max. stat. efficiency	24.6	23.6	%	η _{es}
Max. fan efficiency	25.1	23.9	%	η _e
Max. flowrate	460	490	m ³ /h	Q _{v, max}
Max. stat pressure	360	480	Pa	p _{sf, max}
Max. medium temperature	70	70	°C	T _{m, max}
Max. environment temperature	70	70	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}
Stall current	0.37	0.37	A	I _{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TMI		protectmotor
Protection class		IP33		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} motor
Capacity capacitor		2	μF	C _{cond}
Voltage capacitor		400	V	V _{Ucond}
Number of poles (1)		2.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.23		A	I _{rated, f1}
Speed	2373		1/min	n _{f1}
Efficiency	27.7		%	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.990000	0.000000		cos φ
UL-Certification motor		None		ULcert



to the product detail page