




# Domekt R 400 H C6M

Maximal air flow, m <sup>3</sup> /h	500
Maximal air flow, l/s	139
Reference flow rate, m <sup>3</sup> /s	0,097
Reference pressure difference, Pa	50
SPI, W/(m <sup>3</sup> /h)	0,28
Thermal efficiency of heat recovery, %	84
Electric air heater capacity, kW / Δt, °C	1/8,4
Supply voltage, V	1~230
Maximal operating current HE, A	7,3
Power supply cable, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	125
Electric power input of the fan drive at reference flow rate, W	52
Noise power level, L <sub>WA</sub> , dB(A)	44
Noise pressure level, L <sub>PA</sub> , dB(A), (3 m)	32
Filters dimensions BxHxL, mm	417×210×46
Supply filter class	ePM1 60 (F7)
Exhaust filter class	ePM10 50 (M5)
Unit dimensions BxHxL, mm	515×567×660
Maintenance space, mm	650
Unit weight, kg	49



## Performance

Unit with standard equipment

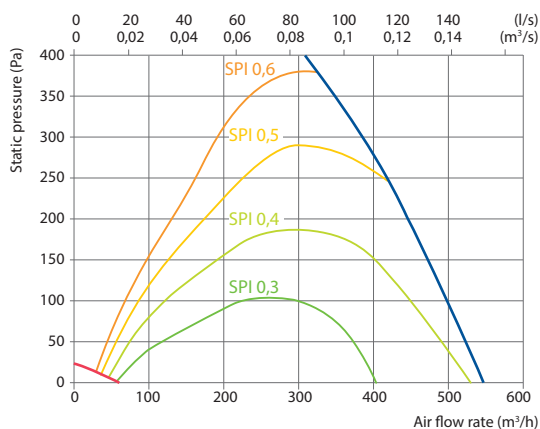


## Temperature efficiency

	Winter				Summer			
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,9	16,2	17	17,7	18,5	22,5	23,3	24


indoor +22 °C, 20 % RH

Shown as right (R1)

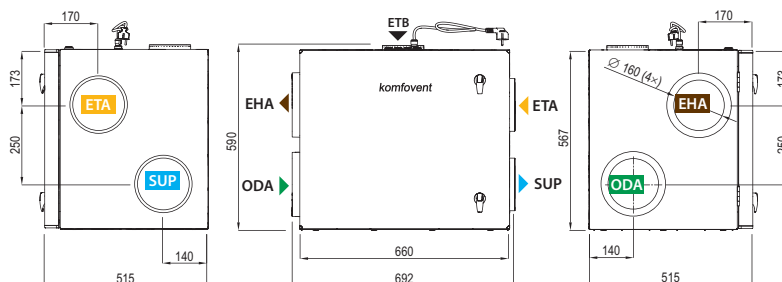


## Accessories

Closing damper	AGUJ-M-160+TF230/CM230
Silencer	ODA/EHA ASTS-160-600-M
	SUP/ETA ASTS-160-900-M
Water heater	DH-160
PPU	PPU-HW-3R-15-0,4-W2
2-way valve (heater)	VVP47.10-0,4+SSF161.05HF
Water cooler	DCW-0,4-3
2-way valve (cooler)	VVP47.10-1,6+SSF161.05HF
Outdoor grill	LD-160
Water heater-cooler	DHCW-160
DX cooler	DCF-0,4-3
Cooling unit	MOU-12HFN8a+ KA8142



Shown as left (L1)



▶ ODA – outdoor intake      ▶ SUP – supply air      ▶ ETA – extract indoor      ▶ EHA – exhaust air      ▶ ETB – additional extraction connection (by-pass – extraction without heat recovery)