

EL 280 E2 02


115334

- Innovative, high-efficiency diagonal fan
- Optimally tuned, CFD-optimized aerodynamics
- The benchmark for efficiency since 2007
- Robust single phase AC motor
- Conveyed medium temperature up to 55 °C in continuous operation
- Housing made of galvanized steel sheet



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

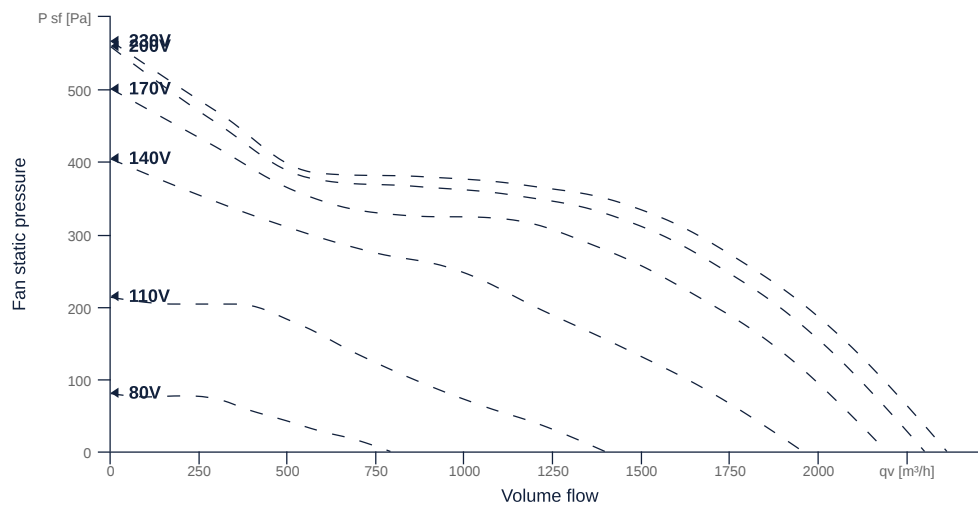

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN280		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	8.65	kg	m
Fan type	Diagonal		Fa _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	270	437	W	P _{ed, max}
Max. operating current (device)	1.64	2	A	I _{ed, max}
Max. speed	2905	3370	1/min	n _{max}
Max. stat. efficiency	50.8	46.3	%	η _{es}
Max. fan efficiency	55	50	%	η _e
Max. flowrate	2360	2710	m ³ /h	q _{v, max}
Max. stat pressure	580	770	Pa	p _{sf, max}
Max. medium temperature	55	60	°C	T _{m, max}
Max. environment temperature	55	60	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	230	V	U _{min}
Stall current	4.5	4.5	A	I _{LRA}



to the product detail page

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TMI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrSUPmotor
Capacity capacitor		8	µF	Ccond
Voltage capacitor		450	V	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Shaft power	220		W	Pout, f1
Efficiency	71.7		%	ηm, f1
Efficiency class	IE3			IEmotor
Min. temperature	-25		°C	Tmotor, min
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2819	1/min	n _{opt}
Efficiency level	50.8	%	N
Efficiency category	statisch		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	0.26	kW	P _{e, opt}
Overall efficiency	67.4	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	341	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1457	m³/h	Q _{v, opt}



to the product detail page